
VTE® - SERIES 752 **BIDIRECTIONAL KNIFE GATE VALVES**

2"-24" (50-600mm) | 240psi (16bar)



Series 752

Bidirectional Knife Gate Valve

The Bray Series 752 features a robust steel reinforced perimeter seat which provides bidirectional zero leakage shutoff.

The replaceable steel reinforced perimeter seat is mechanically retained between both halves of the two-piece bolted body for unsurpassed performance in the most demanding applications.

- 1 Designed for easy, quick conversion between manual and pneumatic actuation. Featuring a lubricant injection port for continuous, smooth operation with minimal maintenance.
- 2 Clevis design and horizontal bolting stabilizes gate ensuring proper alignment.
- 3 Standard multi-layer square packing seal provides exceptional gland sealing.
- 4 Unrestricted flow path with minimal pressure drop achieved through full port valve design.
- 5 Deflection resistant gate design ensures consistent alignment for industry leading durability.
- 6 Replaceable steel reinforced elastomer perimeter seat ensures bidirectional zero leakage shutoff.
- 7 Two-piece bolted body for easy maintenance and seat replacement.



Standard Construction

Body	Gate	Seat	Stem	Gland	Packing	Topworks
WCB	304	Buna-N	304	WCB	PTFE impregnated synthetic fiber	Steel

Body Options

CF8
CF8M

Additional material options may be available upon request. Consult factory for availability.

Gate Options

304, 316, 317 Stainless Steel
SAF 2507 Duplex
SAF 2205 Duplex
17-4PH Stainless Steel
Hastelloy® C
Monel®

Seat Options

Buna-N -35°-194°F/-37°-90°C
EPDM -65°-248°F/-54°-120°C
Viton® -15°-392°F/-26°-200°C

Actuator Options

Direct Mounted Handwheel
Standard (2"-10")
Bevel Gear
Standard (12"-24")
Pneumatic
Hydraulic
Electric

Packing Options

PTFE impregnated synthetic fiber 232°C /450°F
PTFE w/Buna-N Quad Seal 90°C/194°F
PTFE w/Viton® Quad Seal 200°C/392°F

Specifications & Standards

Size Range 2" to 24" (50 - 600mm)
Pressure Rating 240psi (16bar)
Body Style Two-piece bolted (Wafer)

Design MSS SP-81
Testing MSS SP-151
Face-to-Face MSS SP-81
Certification Canadian CRN
Drilling* ASME B16.5 CL150

*Additional drilling options available. Consult factory for availability.

Dimensions


In. (mm)	A	B	C	D	E	F	G	H	I	J
2 (50)	1.89 48	4.76 121	3.62 92	13.33 379	15.87 403	7.99 203	18.41 510	--	--	--
3 (80)	2.01 51	6.02 153	5.00 127	15.71 419	18.49 470	7.99 203	21.84 575	--	--	--
4 (100)	2.01 51	7.52 191	6.18 157	17.73 510	22.73 577	10.00 254	25.24 701	--	--	--
6 (150)	2.24 57	9.53 242	8.50 216	22.36 622	28.74 730	11.77 299	33.41 903	--	--	--
8 (200)	2.76 70	11.77 299	10.63 270	24.95 703	35.28 896	15.98 406	40.06 1086	--	--	--
10 (250)	2.76 70	14.25 362	12.76 324	31.51 800	40.67 1033	15.98 406	50.07 1272	44.27 1125	12.05 306	20.00 508
12 (300)	2.99 76	17.01 432	14.76 375	--	--	--	55.72 1415	51.61 1311	12.05 306	20.00 508
14 (350)	2.99 76	18.74 476	16.26 413	--	--	--	59.99 1524	56.59 1437	12.05 306	20.00 508
16 (400)	3.50 89	21.26 540	18.50 470	--	--	--	70.46 1790	62.83 1596	12.99 330	20.00 508
18 (450)	3.50 89	22.76 578	21.00 534	--	--	--	77.64 1972	69.59 1768	12.99 330	20.00 508
20 (500)	4.49 114	25.00 635	22.99 584	--	--	--	86.14 2188	81.10 2060	13.46 342	20.00 508
24 (600)	4.49 114	29.53 750	27.24 692	--	--	--	99.08 2517	94.15 2392	13.46 342	20.00 508

Dimensions are approximate and subject to change. Consult factory for certified drawings.

Weights

Size	in mm	2 50	3 80	4 100	6 150	8 200	10 250	12 300	14 350	16 400	18 450	20 500	24 600
HANDWHEEL	lb kg	26 12	42 19	49 22	84 38	132 60	174 79	--	--	--	--	--	--
PNEUMATIC ACTUATOR	lb kg	53 24	71 32	101 46	123 56	198 90	238 108	419 190	699 317	915 415	1124 510	1301 590	1532 695
GEAR OPERATOR	lb kg	--	--	--	--	188 85	243 110	298 135	463 210	650 295	864 392	1058 480	1290 585

*Above table is applicable for 10 - 16 bar. For 20 bar consult factory.

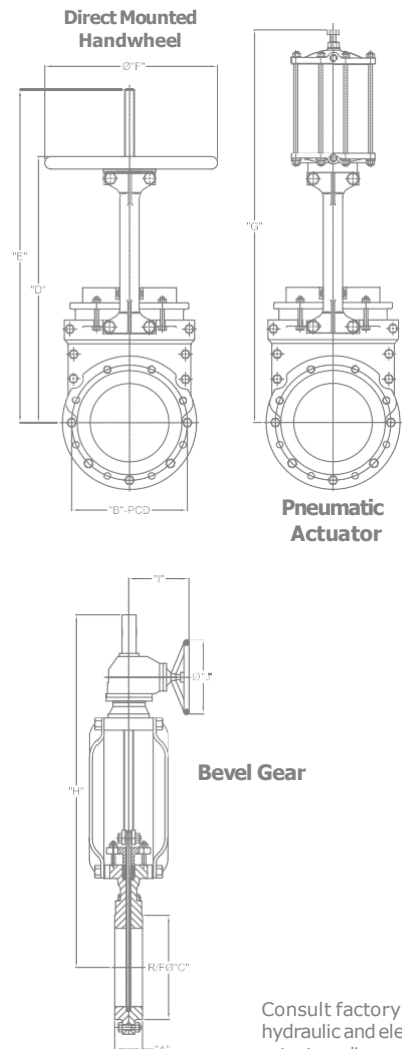

Consult factory for hydraulic and electric actuators dimensions.

VAL TECHNOLOGY & ENGINEERING SDN. BHD.

No. 1, Lorong Teras Jaya 3, Tanaman Perindustrian Teras Jaya,
13400 Butterworth, Penang, Malaysia.

Tel: +604-333 4119 (Hunting) Fax: +604-333 4120

Email: sales@valtech.com.my URL: www.valtech.com.my